


Model
UNJ9226GK

Part Number
644LV5604AA

Refrigerant
R-404A

Voltage
230V

Frequency
50Hz

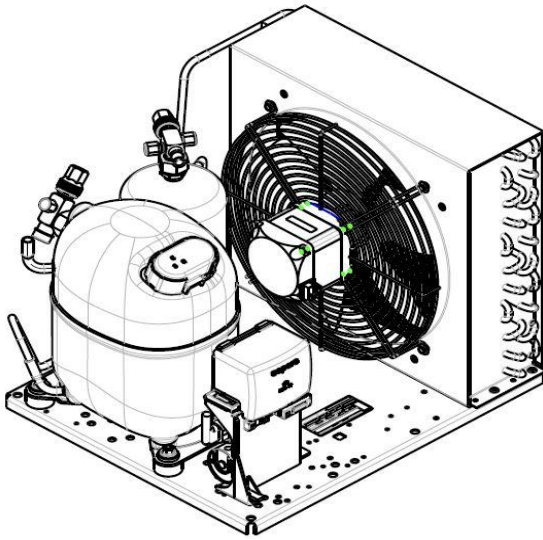

General information

Motor Type: CSR Application: M/HBP
 Expansion device: Capillary - expansion valve
 Weight (kg): 39,2
 LRA (A): 27,5
 Max. current (A): 7,37

Fan Motor

Number: 1 Air Flow(m3/h): 700
 Shaft Power(W): 34 Blades diameter(mm): 300

Noise(Maximum noise at 43°C ambient and 43°C return gas)

at 220V/50Hz

Sound Power Level dB (A):	70,4		
Sound Pressure Level dB (A):	at 1m	at 5m	at 10m
	62,4	48,4	42,4

Institute approvals: CE




Components included:

Components included:	Description	Spare partcode
Compressor	NJ9226GK	944LV19..AC
Condenser	3R14T	2451221
Fan Kit	34W 300/28°/5B	1996585
Valve 1	5/8" SAE(3)	2110054
Valve 2	3/8" SAE(3)	2110049
Electrical Kit		944LV1904Z

Accessories

Accessories	Description	Part No.
HP pressostat	PRESSOSTAT P100CP-106D	2466034
LP pressostat	PRESSOSTAT ALCO PS1 A3K	2466036
Filter Dryer	ADK 0510 MMS	2730010
Sight glass	MIAM 10	2464040
Fan speed controller	Johnson Cont P215PR	2464088
Dog house		1457004

Electrical Diagram:

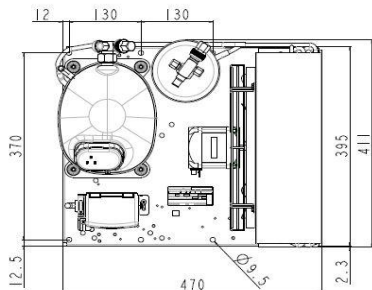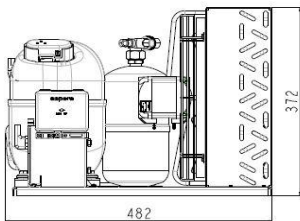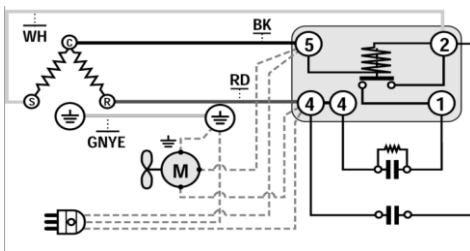

Performance Data (Calorimeter): 220V/50Hz

Evaporating temperature °C	Cooling capacity W	Power Consumption W	Current Consumption A	Efficiency W/W
10	3360	1490	7,0	2,26
5	2909	1250	6,4	2,33
0	2473	1279	5,9	1,93
-5	2071	1178	5,4	1,76
-10	1701	1035	4,9	1,64
-15	1364	966	4,5	1,41
-20	1047	873	4,1	1,20

Standard: EN13215

ambient 32°C, return gas 20°C, subcooling 3K

Operational envelope:

