



INDICATIVE PHOTO

General features : RS1060B

RS range unit coolers have been designed to be installed inside cold rooms suited for fresh and frozen goods storage.

Their shape, being extremely compact, make their installation possible also in cold rooms having very small dimensions

RS range unit coolers are available in two main versions: the one suited for high temperature (differentiated fin spacing 3,5/7mm); the other version suited for medium and low temperature application (differentiated fin spacing 4,5/9mm).

In models for high temperature the version with the fitted defrosting heater is not available; for these models the heaters are optional items and they will be supplied not mounted.

The models for medium and low temperature application are available in the version supplied without defrosting heater (mod. RS...B) and with defrosting heater mounted and wired on the unit cooler's terminal box as well (mod. RS...BED).

The coil is made of aluminium fins and 3/8" copper tube with geometry 25x22

It is tested with nitrogen at a pressure of 25 bar

The fan motor models in use have the following features:

Manufactured following EN 60335-1 laws, with internal thermal protection

Draw through air flow

Fan guard made of plastic and brackets made of steel

Fan diameter 200mm, 34° inclination

Power supply 220-240V/1/50-60Hz

IP42 protection rate

Operating temperature from -40°C to +40°C

B insulation class

It is tested with nitrogen at a pressure of 25 bar

The housing is made of aluminium

The manufacturing solutions used give the housing strength and guarantee the absence of vibrations during the functioning.

Screws, washers and nuts are made of stainless steel

The B and BED models are supplied with fitted drip tray



INDICATIVE PHOTO


Product file : Unit coolers

Code	RS1060BED
Model	Ceiling
Range	RS
Application	LBP
Net weight	4,8 kg
Inlet connection	9.52 mm
Outlet connection	9.52 mm
Drain connection	1/2" Gas (20mm)
Ped	0
Rows	4
Fin spacing	4,5/9
Circuit volume	0,58 dm ³
Total surface	1,78 m ²

Fan motor

Type	AC
Fans no.	1
Diameter	200 mm
Power supply	220-240/1/50-60
Defrost	400 W
Speed	1300 rpm
Power consumption	43 W
Current consumption	0,25 A
Air flow	213 m ³ /h
Air throw	2.5 m

Technical drawing - RS1060B

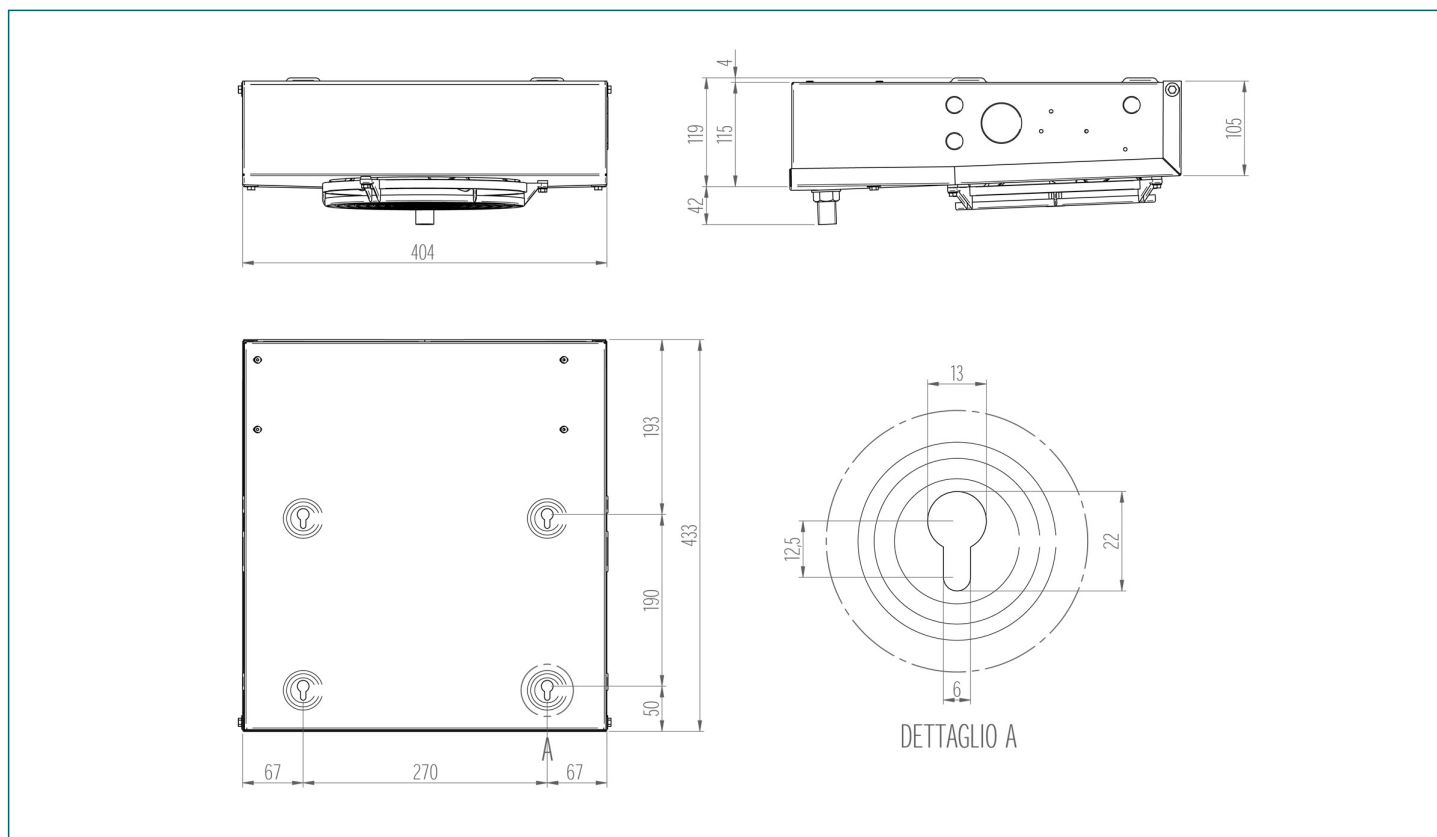

Refrigerating capacity table (watt) - Gas : R404A

dT \ Tc	-40°C	-35°C	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C
10	350	385	420	449	474	490	506	532	563
9	324	351	378	401	416	429	448	470	499
8	291	312	333	351	362	372	388	407	432
7	253	269	285	297	305	313	326	342	364
6	211	222	233	239	244	253	264	278	297
5	164	170	176	179	183	189	198	209	224